Give us a call today....

we have one boxed and ready for you!

1.877.213.7130

White Fiber Glass Box with nails

NEW PRODUCT

1-GANG WHITE FIBER GLASS NEW WORK WALL ELECTRICAL BOX

2 hour fire-rated

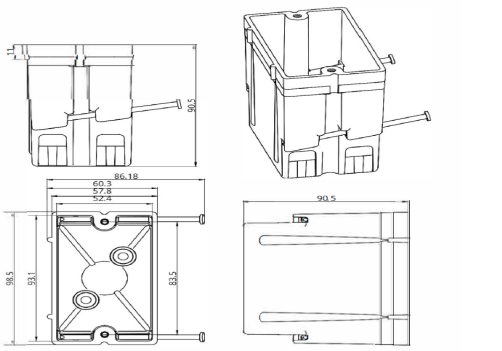

Dimensions are nominal

Fire Classification:

Fire Test of Building Construction Materials
ANSI / UL 263: File No. 5010519(Category / File No.) Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less
Shall be separated by a horizontal distance of not less than 3 inches

FEATURES:

New work electrical 1-Gang 22.5 Cu In rigid hard wall box for use where the wall is not enclosed. Ships with nails captive for faster installation. Equipped with Machine tapped device holes, no distortion with high temperatures, shatter resistant with low temperatures knockouts for entry of sheathed cable, and integral clamps to hold wires securely. White Fiber Glass construction for higher performance, lower installation cost, and rust and corrosion resistance.

PBOX122NO-FG(FG01N) has been tested, investigated and found to comply with the requirements of the Standard(s) for Non-Metallic Outlet Boxes, Flush-Device Boxes & Covers (UL-514C) and is identified with the ETL Listed Mark.

- Knockouts on fiberglass boxes are complete, reducing drafts and easily removed with wire for no tools installation
- Device holes are Pre-Installed and tapered for secure device installation and drastically reduce device pull out
- Fiberglass boxes feature factory installed Speed PVC Klamps to provide a secure hold on installed wiring
- Mounted with angled mid nails
- Offset gauge marks on the box give positive stop for the proper wall thickness
- Leveling ribs position the face of the box parallel to the wall surface
- High Strength Fiberglass Reinforced Polyester Material
- Non-distorting in high heat, impact resistant in cold temps
- ETL Listed to UL-514C and carries 2-hour fire rating
- The boxes are intended to be installed in accordance with ANSI/NFPA 70, "National Electrical Code."

PART NUMBER	DESCRIPTION	BOX QTY	BOX WEIGHT_KG	Pallet Quantity
PBOX122NO-FG	1-GANG 22.5 CU IN WHITE FIBER GLASS SWITCH/ OUTLET BOX W/NAILS ON	60	10.0	2520

WARNING This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and which is known to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

SIGMA PIPING PRODUCTS
12600 CARDINAL MEADOW SUITE 108 • SUGAR LAND, TX 77498
O: 281.494.3999 • F: 281.494.0950 • T: 1.877.213.7130
ELITE COMPONENTS UniqueFlo Chem Oil PRODUCTS
WWW.ELITECOMPONENTS.COM
ELITE COMPONENTS

SUBJECT TO CHANGE WITHOUT NOTICE. GO TO WEB SITE FOR MOST CURRENT PRODUCT INFORMATIONS AND CHANGES OR CONTACT ELITE COMPONENTS SALES REPRESENTATIVE FOR ANY ASSISTANCE.
ELITE COMPONENTS © 2022

Give us a call today....

we have one boxed and ready for you!

1.877.213.7130

White Fiber Glass Box with nails

NEW PRODUCT

2-GANG WHITE FIBER GLASS NEW WORK WALL BOX

2 hour fire-rated

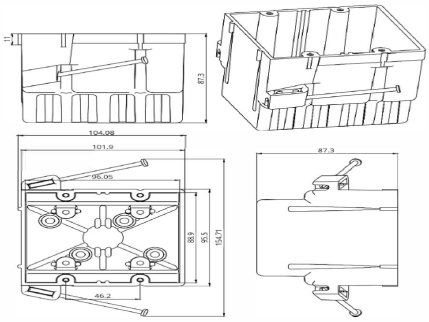

Dimensions are nominal

Fire Classification:

Fire Test of Building Construction Materials
ANSI / UL 263: File No. 5010519(Category / File No.) Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less
Shall be separated by a horizontal distance of not less than 3 inches

FEATURES:

New work electrical 2-Gang 37 Cu In. rigid hard wall box for use where the wall is not enclosed. Ships with nails captive for faster installation. Equipped with tapped device holes, slot provision for low voltage divider, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Pre-Installed PVC Clamps.

PBOX237NO-FG(FG02N) has been tested, investigated and found to comply with the requirements of the Standard(s) for Non-Metallic Outlet Boxes, Flush-Device Boxes & Covers (UL-514C) and is identified with the ETL Listed Mark.

- Knockouts on fiberglass boxes are complete, reducing drafts and easily removed with wire for no tools installation
- Device holes are Pre-Installed and tapered for secure device installation and drastically reduce device pull out
- Fiberglass boxes feature factory installed Speed PVC Klamps to provide a secure hold on installed wiring
- Mounted with angled mid nails
- Offset gauge marks on the box give positive stop for the proper wall thickness
- Leveling ribs position the face of the box parallel to the wall surface
- High Strength Fiberglass Reinforced Polyester Material
- Non-distorting in high heat, impact resistant in cold temps
- ETL Listed to UL-514C and carries 2-hour fire rating
- The boxes are intended to be installed in accordance with ANSI/NFPA 70, "National Electrical Code."

PART NUMBER	DESCRIPTION	BOX QTY	BOX WEIGHT_KG	Pallet Quantity
PBOX237NO-FG	2-GANG 37 CU IN WHITE FIBER GLASS SWITCH/OUTLET BOX W/NAILS ON	60	15.0	1440

WARNING This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and which is known to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

SIGMA PIPING PRODUCTS
12600 CARDINAL MEADOW SUITE 108 • SUGAR LAND, TX 77498
O: 281.494.3999 • F: 281.494.0950 • T: 1.877.213.7130
ELITE COMPONENTS UniqueFlo Chem Oil PRODUCTS
WWW.ELITECOMPONENTS.COM
ELITE COMPONENTS

SUBJECT TO CHANGE WITHOUT NOTICE. GO TO WEB SITE FOR MOST CURRENT PRODUCT INFORMATIONS AND CHANGES OR CONTACT ELITE COMPONENTS SALES REPRESENTATIVE FOR ANY ASSISTANCE.
ELITE COMPONENTS © 2022

Give us a call today....

we have one boxed and ready for you!

1.877.213.7130

White Fiber Glass Box with nails

NEW PRODUCT

3-GANG WHITE FIBER GLASS NEW WORK WALL ELECTRICAL BOX

2 hour fire-rated

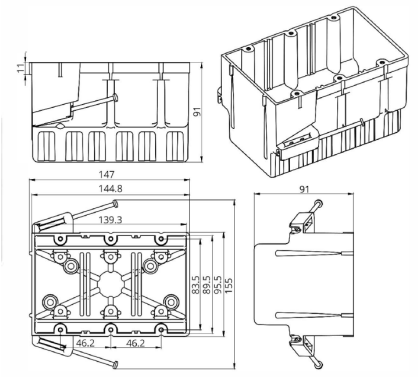

Dimensions are nominal

Fire Classification:

Fire Test of Building Construction Materials
ANSI / UL 263: File No. 5010519(Category / File No.) Note: Products must also be certified to ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less
Shall be separated by a horizontal distance of not less than 3 inches

FEATURES:

New work electrical 3 Gang 56.5 Cu In. rigid hard wall box for use where the wall is not enclosed. Ships with nails captive for faster installation. Equipped with tapped device holes, slot provision for low voltage divider, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Pre-Installed PVC Clamps.

PBOX356NO-FG(FG03N) has been tested, investigated and found to comply with the requirements of the Standard(s) for Non-Metallic Outlet Boxes, Flush-Device Boxes & Covers (UL-514C) and is identified with the ETL Listed Mark.

- Knockouts on fiberglass boxes are complete, reducing drafts and easily removed with wire for no tools installation
- Device holes are pre-tapped and tapered for secure device installation and drastically reduce device pull out
- Fiberglass boxes feature factory installed Speed PVC Klamps to provide a secure hold on installed wiring
- Mounted with angled mid nails
- Offset gauge marks on the box give positive stop for the proper wall thickness
- Leveling ribs position the face of the box parallel to the wall surface
- High Strength Fiberglass Reinforced Polyester Material
- Non-distorting in high heat, impact resistant in cold temps
- ETL Listed to UL-514C and carries 2-hour fire rating
- The boxes are intended to be installed in accordance with ANSI/NFPA 70, "National Electrical Code."

PART NUMBER	DESCRIPTION	BOX QTY	BOX WEIGHT KG	Pallet Quantity
PBOX356NO-FG	3-GANG 56.5 CU IN WHITE FIBER GLASS SWITCH/OUTLET BOX W/NAILS ON	30	12.0	720

WARNING This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and which is known to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

SIGMA PIPING PRODUCTS

12600 CARDINAL MEADOW SUITE 108 • SUGAR LAND, TX 77498
O: 281.494.3999 • F: 281.494.0950 • T: 1.877.213.7130

ELITE COMPONENTS UniqueFlo Chem Oil PRODUCTS

WWW.ELITECOMPONENTS.COM
ELITE COMPONENTS

SUBJECT TO CHANGE WITHOUT NOTICE. GO TO WEB SITE FOR MOST CURRENT PRODUCT INFORMATIONS AND CHANGES OR CONTACT ELITE COMPONENTS SALES REPRESENTATIVE FOR ANY ASSISTANCE.

ELITE COMPONENTS © 2022

Give us a call today....

we have one boxed and ready for you!

1.877.213.7130

White Fiber Glass Box with nails

NEW PRODUCT

4-GANG WHITE FIBER GLASS NEW WORK WALL ELECTRICAL BOX



2 hour fire-rated

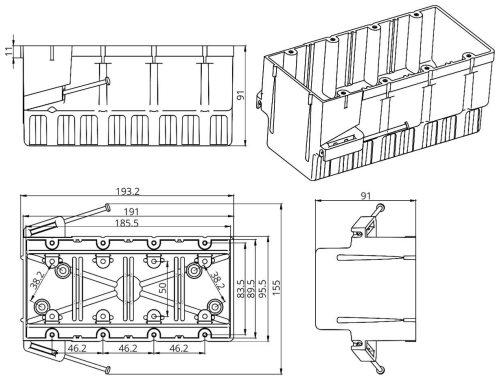

Dimensions are nominal

Fire Classification:

Fire Test of Building Construction Materials
ANSI / UL 263: File No. 5010519(Category / File No.) Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less
Shall be separated by a horizontal distance of not less than 3 inches

FEATURES:

New work electrical 4- Gang 75 Cu In. rigid hard wall box for use where the wall is not enclosed. Ships with nails captive for faster installation. Equipped with tapped device holes, slot provision for low voltage divider, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Pre-Installed PVC Clamps.

PBOX475NO-FG(FG04N) has been tested, investigated and found to comply with the requirements of the Standard(s) for Non-Metallic Outlet Boxes, Flush-Device Boxes & Covers (UL-514C) and is identified with the ETL Listed Mark.

- Knockouts on fiberglass boxes are complete, reducing drafts and easily removed with wire for no tools installation
- Device holes are pre-tapped and tapered for secure device installation and drastically reduce device pull out
- Fiberglass boxes feature factory installed Speed Klamps to provide a secure hold on installed wiring
- Mounted with angled mid nails
- Offset gauge marks on the box give positive stop for the proper wall thickness
- Leveling ribs position the face of the box parallel to the wall surface
- High Strength Fiberglass Reinforced Polyester Material
- Non-distorting in high heat, impact resistant in cold temps
- ETL Listed to UL-514C and carries 2-hour fire rating
- The boxes are intended to be installed in accordance with ANSI/NFPA 70, "National Electrical Code."

PART NUMBER	DESCRIPTION	BOX QTY	BOX WEIGHT KG	Pallet Quantity
PBOX475NO-FG	4-GANG 75 CU IN WHITE FIBER GLASS SWITCH OUTLET BOX W/NAILS ON	30	13.5	480

WARNING This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and which is known to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

SIGMA PIPING PRODUCTS

12600 CARDINAL MEADOW SUITE 108 • SUGAR LAND, TX 77498
O: 281.494.3999 • F: 281.494.0950 • T: 1.877.213.7130

ELITE COMPONENTS UniqueFlo Chem Oil PRODUCTS

WWW.ELITECOMPONENTS.COM
ELITE COMPONENTS

SUBJECT TO CHANGE WITHOUT NOTICE. GO TO WEB SITE FOR MOST CURRENT PRODUCT INFORMATIONS AND CHANGES OR CONTACT ELITE COMPONENTS SALES REPRESENTATIVE FOR ANY ASSISTANCE.
ELITE COMPONENTS © 2022

Give us a call today....

we have one boxed and ready for you!

1.877.213.7130

White Fiber Glass Box with nails

NEW PRODUCT

4” ROUND CEILING WHITE FIBER GLASS BOX WITH NAILS

2 hour fire-rated

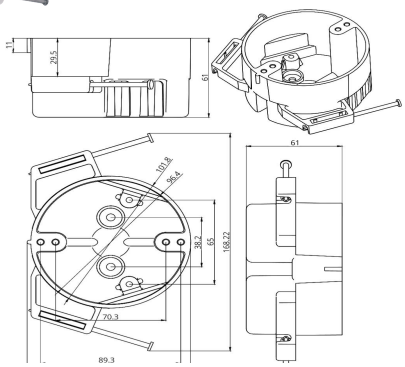

Dimensions are nominal

Fire Classification:

Fire Test of Building Construction Materials
ANSI / UL 263: File No. 5010519(Category / File No.) Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less
Shall be separated by a horizontal distance of not less than 3 inches

Fire Resistance Classification in Floor-Ceiling Assemblies 2-Hours or Less
Distance between boxes in adjacent cavities may be reduced to 16 inches

FEATURES:

4-inch round ceiling box with two captive mounting nails. Equipped with tapped fixture holes, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Pre-Installed PVC Speed Clamps.

LRB-204-FG(FG05N) has been tested, investigated and found to comply with the requirements of the Standard(s) for Non-Metallic Outlet Boxes, Flush-Device Boxes & Covers (UL-514C) and is identified with the ETL Listed Mark.

- Two captive mounting nails
- Impact-resistant hard rigid construction
- Virtually unbreakable and non-conductive
- Volume 22.5 cu.in.
- 1 Gang and Round Shape.
- ETL listed for fixture support
- ETL listed to UL 514C & ETL 2 hour fire rated
- The boxes are intended to be installed in accordance with ANSI/ NFPA 70, "National Electrical Code."

MATERIAL:

White Fiber Glass

STATIC LOAD RATING:

50 lbs for a Lighting Fixture

PART NUMBER	DESCRIPTION	BOX QTY	BOX WEIGHT_KG	Pallet Quantity
LRB-204-FG	4" ROUND 22.5 CU IN CEILING WHITE FIBER GLASS BOX WITH NAILS ON	60	13.0	900

WARNING This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and which is known to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

SIGMA PIPING PRODUCTS

12600 CARDINAL MEADOW SUITE 108 • SUGAR LAND, TX 77498
O: 281.494.3999 • F: 281.494.0950 • T: 1.877.213.7130

ELITE COMPONENTS · UniqueFlo · Chem Oil PRODUCTS

WWW.ELITECOMPONENTS.COM

ELITE COMPONENTS

SUBJECT TO CHANGE WITHOUT NOTICE. GO TO WEB SITE FOR MOST CURRENT PRODUCT INFORMATIONS AND CHANGES OR CONTACT ELITE COMPONENTS SALES REPRESENTATIVE FOR ANY ASSISTANCE.

ELITE COMPONENTS © 2020

Give us a call today....

we have one boxed and ready for you!

1.877.213.7130

White Fiber Glass Box with ADJ Bar Hanger

NEW PRODUCT

NEW WORK 22.5 CU IN WHITE FIBER GLASS CEILING BOX WITH HANGER BAR

2 hour fire-rated

Fire Classification:

Fire Test of Building Construction Materials
ANSI / UL 263: File No. 5010519 (Category / File No.) Note: Products must also be certified to: ANSI / UL 514C

Fire Resistance Classification in Wall Assemblies 2-Hours or less
Shall be separated by a horizontal distance of not less than 3 inches

Fire Resistance Classification in Floor-Ceiling Assemblies 2-Hours or Less
Distance between boxes in adjacent cavities may be reduced to 16 inches

FEATURES:

PBAR-1424-FG is 22.5 cu in. New Work(New Construction) ceiling box with an attached hanger bar adjustable support between ceiling joist. PBAR-1424-FG is used in residential construction 2-HR fire resistive walls & ceiling. Hanger bar can be adjusted from 14" to 24" length. It is equipped with tapped fixture holes, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Pre-Installed Speed PVC Clamps.

PBAR-1424-FG(FG06N) has been tested, investigated and found to comply with the requirements of the Standard(s) for Non-Metallic Outlet Boxes, Flush-Device Boxes & Covers (UL-514C) and is identified with the ETL Listed Mark.

- PBAR-1424-FG confirms to UL-514C for fixture support up to 50 lbs.
- 22.5 Cu. In. capacity of White Fiber glass Ceiling Box
- ETL listed to UL 514C
- ETL 2 Hour Fire Resistant
- The boxes are intended to be installed in accordance with ANSI/ NFPA 70, "National Electrical Code."

MATERIAL:

White Fiber Glass Ceiling Outlet Box

STATIC LOAD RATING:

50 lbs for a Lighting Fixture

PART NUMBER	DESCRIPTION	BOX QTY	BOX WEIGHT KG	Pallet Quantity
PBAR-1424-FG	1-GANG 22.5 CU IN CEILING OUTLET BOX W/ADJUSTABLE HANGER BAR	50	20.0	1500

WARNING This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and which is known to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

SIGMA PIPING PRODUCTS
12600 CARDINAL MEADOW SUITE 108 • SUGAR LAND, TX 77498
O: 281.494.3999 • F: 281.494.0950 • T: 1.877.213.7130
ELITE COMPONENTS UniqueFlo Chem Oil PRODUCTS
WWW.ELITECOMPONENTS.COM
ELITE COMPONENTS

SUBJECT TO CHANGE WITHOUT NOTICE. GO TO WEB SITE FOR MOST CURRENT PRODUCT INFORMATIONS AND CHANGES OR CONTACT ELITE COMPONENTS SALES REPRESENTATIVE FOR ANY ASSISTANCE.
ELITE COMPONENTS © 2022